


Datasheet 100



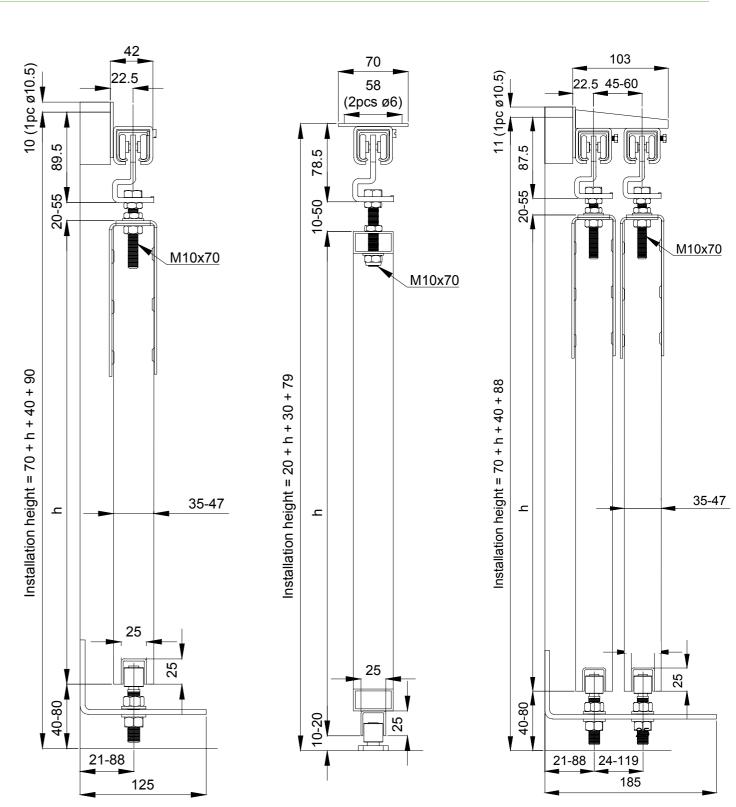

The series 100 is one of the most versatile Helaform series. It offers solutions for straight sliding doors and industrial curtains, but also for special applications such as conveyor systems, cable trolleys and watering systems. Typical door installations include external doors for **storage facilities** and **agricultural buildings**, but also

medium-weight interior partitions, sliding screens and grills.



Specifications

Weight (max.capacity) 120 kg / door

Bracket interval (max.) 1000 mm



Hangers with nylon and steel wheels. Lubricated for life bearings.



Hot dipped galvanized steel track (min. 20 $\mu m).$




Zinc plated (min. 8 µm) steel parts. Tested in salt water spray chamber (240 h).

SERIES 100

SERIES **100**







	CODE
K-100 2 m	30017
K-100 3 m	30013
K-100 4 m	30014
K-100 6 m	30016

HANGERS









	MPS-100/nylon For track K-100. (Capacity 120 kg / pair)	30040
ı		







LOP-100 /nylon
For track K-100.
(Capacity 120 kg / pair)

MPS-100/steel For track K-100. (Capacity 120 kg / pair)


60106

30042

HANGERS WITH FIXING PLATES









PPS-100/nylon For track K-100. (Capacity 120 kg / pair) (Door thickness 35-47 mm)	30041
PPS-100/steel For track K-100. (Capacity 120 kg / pair) (Door thickness 35-47 mm)	30043

FIXING PLATES				CODE
	57 ohelaform o	2.50 35 - 47	PLS-100/150 Side fixing. For timber door. For hangers MPS-100, MP-150 and MPS-150. (Door thickness 35-47 mm)	40100
	57 O holiaform © Go	2.50 2.50	PLS-100/150/E Side fixing. Adjustable. For timber door. For hangers MPS-100, MP-150 and MPS-150. (Door thickness 35-47 mm)	40101
• • • •	70 140 70 12 34 57	5	PLP-100/150, M10 Top fixing. For timber door. For hangers MPS-100, MP-150 and MPS-150. (Door thickness min. 25 mm)	40103

WALL BRACKETS









SKL-100 Joint bracket. For track K-100. (Door thickness max, 40 mm)	30070
(Door thickness max. 40 mm)	








SKL-100 Joint bracket, adjustable. For track K-100. (Door thickness max 40 mm)


3008

SERIES 100

SERIES 100


40110

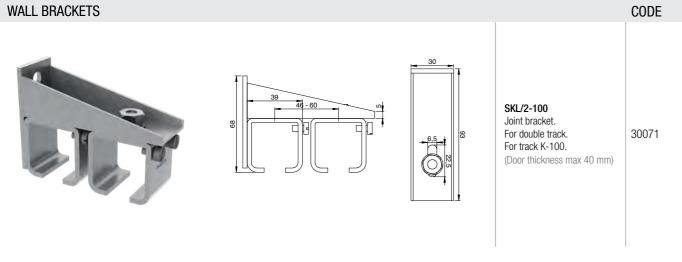

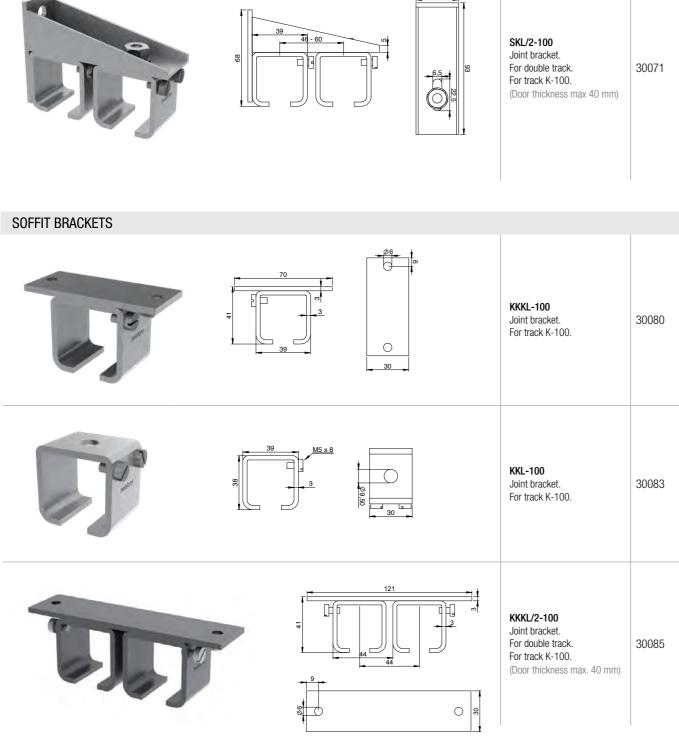

TRACK JOINTS






P	125	
0	0	0
	holaform	

LK-100 Dismountable jointing sleeve. For track K-100. Not suitable for track with soffit mounting.

30090

TRACK JOINTS			CODE
	39	LKU-100/100 mm For track K-100.	30091
	100 Holistorm	LKU-100/100 mm, for welding For track K-100.	30093
. 6.0	39 150	LKU-100/200 mm For track K-100.	30092
	200 heleform 80	LKU-100/200 mm, for welding For track K-100.	30094

ACCESSURIES	25 Ø 22 Ø 10 R	Stop KP-75/100 Stops the hanger inside the track. For tracks K-75, K-75 P, K-75	20110
		Flow, K-75 Junior and K-100.	

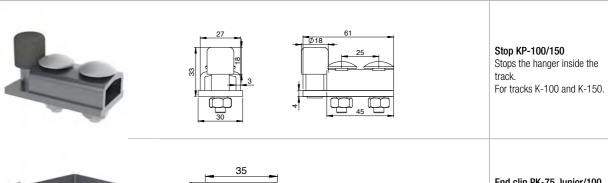

31,50	0.50		End clip PK-75 Junior/100 Prevents lateral movement of the track. For tracks K-75 Junior and K-100.	20121
-------	------	--	---	-------

BOTTOM GUIDE OPTIONS ARE PRESENTED ON PAGE 98.

NOTE! Bottom guides must be used with door installations.

ACCECCODIEC

76 77